www.iconplastics.com.au



Icon Plastics "ico-duct' is compliant to AS:1530.3 - 1999 Building Standard Specification UL181.9 -1994 (in accordance with AS:4254-2002)



350mm X 75mm oval

370mm X 93mm external


DUCTING SYSTEM



LOW




PROFILE

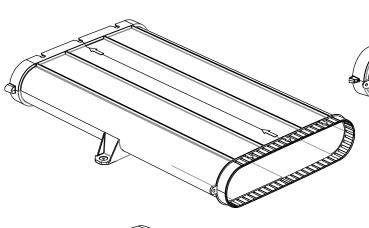







Designed for ventilation/extraction for buildings with ceiling voids restricted





- Safe, easy to handle (no sharps/burrs)
- Duct work including straights, bends, reducers, transitions
- Quick on site customization to account for path obstacles
- Easy to install saving on labour time
- Air delivery is equivalent to 180mm dia. circular ducting (carries approx. 100Lt per.sec.)
- Fire Retardancy & Smoke Index rating complies to AS:
 1530.3 Building Standard Specification
- Material is rated Non-Hazardous in accordance to NOHSC & ADG codes

